Drumore Friends

MEETING HOUSE · DRUMORE TOWNSHIP · LANCASTER COUNTY, PA

A visual system for a lasting home for Beth's stories: the people of the Drumore Friends Meeting House, the families behind them, and the places they lived.



TODAY · 2025 photograph

The meeting house in spring. Archive post P016. The brand's colors were measured from this building.

Code · The archive · Directions · Idea · Color · Type · Mark · Images · Handwriting · Time & doubt · Maps · Family tree · Components · Page concepts · Wynona's story · Do / avoid · Tokens

READ THIS FIRST

Where the code lives

Everything in this book is working HTML, CSS and JavaScript. Here is where to find it.

The files

- **Folder:** `Genealogy Project/Drumore Friends Brand Book v0.2/`
- **`Drumore-Friends-Brand-Book-v0.2.html`**: the whole book in one file. Open it in a browser to click through the interactive parts.
- **`drumore-brand-book-source.html`**: the same book with readable code. Images appear as `{{name}}` placeholders.
- **`assets/`**: the photographs and portrait crops those placeholders point to.
- **`build.py`**: run `python3 build.py` after editing the source to rebuild the one-file book.
- **The website** built from this book lives in `Genealogy Project/Drumore History Prototype/`.

Find a piece of the code

Open the source file and search for these markers:

- `:root {`: every color, font and motion token.
- `Shared people, relationships and one selection`: the people, couples, families, "raised by," places, and the `select()` function that keeps every view on the same person.
- `Main timeline mock: four views, one selection`: lifelines, Family, Map and List tabs, and the docked side panel.
- `Family tree, chapter 11`: the full interactive tree.
- `Map style study` and `Handwriting switch`: the map drawing and the A/B transcription fonts.
- Page markup: `#tlSvg`, `#famView`, `#mapView`, `#listView`, `#tlDock`, `#treeSvg`, `#txCard`.

In a PDF, the interactive views show their starting state: Wynona selected, Timeline tab open. Open the HTML file to switch between Timeline, Family, Map and List, select other people, and switch the handwriting options.

BEFORE WE START

What the archive says about the brief


The brief was written before anyone looked at the material. The archive changes several of its assumptions.

These findings come from the Facebook archive captured on 14–15 October 2026 and the curation notes made from it. They shape everything that follows.

140	513	37	1683	16 of 37
posts, June 2025 – Oct 2026	photographs and scans	dated event candidates	earliest dated event	dated to the day; the rest are months, years, ranges or "about"

1	**The name is Drumore, and “Friends” means Quakers.** The brief says “Drewmore Friends.”	The sign at the meeting house reads “Drumore Friends Meeting House, Established 1816.” Friends here are members of the Religious Society of Friends, so this is a meeting’s history, not a “friends of” society. Beth’s posts use both “Meeting House” (56 times) and “Meetinghouse” (66). This book follows the sign until she chooses.
2	**The record runs 1683–1916, with today attached.** The brief says roughly 1600 to the present.	A straight 1600–2026 axis would put most of the screen over empty years and squeeze the dense diary years into a sliver. The timeline uses **eras of planned width**, with visible folds where time is compressed.
3	**Quaker dates need their own rules.** The brief treats dates as plain numbers.	Minutes are dated like “9th of 11th month, 1811.” Before 1752 the year began in March, so “9th month” meant November. Beth explains this in one of her own posts. Every date keeps **what was written** beside the modern reading.
4	**The story starts somewhere else.** The brief asks for a tightly focused local map.	Twelve of the 37 events happen in Germantown, Chester County or Gwynedd before the families reach Drumore. The system has **two map scales**: a detailed Drumore map and a schematic journey map.
5	**Visitors arrive from Facebook, on phones.** The brief’s references are desktop showpieces.	Beth’s readers tap a link in their feed. The phone is the **primary** layout, with time running down the screen, and every story needs a good link preview.
6	**The archive is rich in people and pictures.** The brief wants Histography’s density.	Thirty-seven dots would look empty. The density comes from **people**. Each life is drawn as a line with a portrait at its start, and the family tree shows how those lives connect.
7	**Nothing is verified yet, and some sources disagree.** The brief asks us not to imply certainty.	Some of Beth’s posts disagree. One says Wynona’s mother died “when she was 3,” and another says 1874. A reunion photo is captioned 1910 while the event list says 1912. The design shows **both readings** until the record settles them.

Why the timeline can’t be a straight ruler

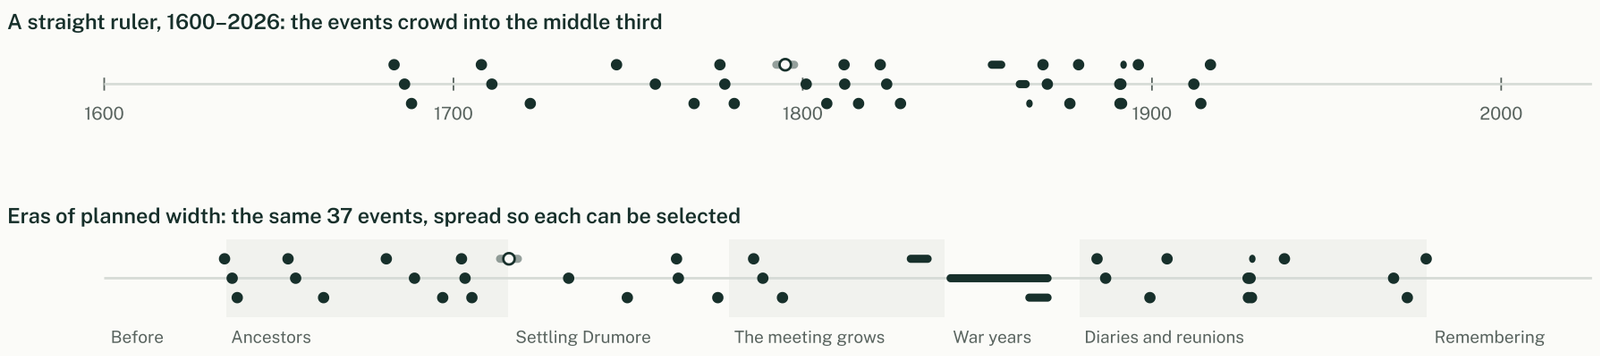

Real data: the 37 dated event candidates in `curation/timeline-events.json`. Era names are a first draft for Beth to rename.

CHAPTER 1

Three directions


Three different answers to the brief, then one recommendation.



RECOMMENDED

A · Plain Light

The Quaker idea of plainness, used as a working design method rather than a costume. The site feels like the meeting house on an open-house morning: limewashed walls, daylight, walnut benches and dark green shutters. The interface stays quiet and exact, so the photographs and

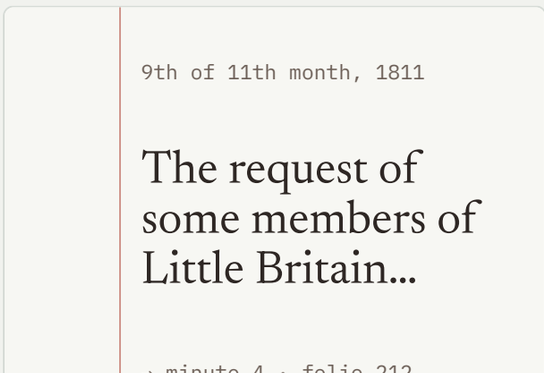

B · The Minute Book

The meeting’s minute book becomes the interface. Everything is a numbered entry in a ruled ledger: the date in Quaker form, the minute, the clerk’s hand. Stories grow as new minutes are added under old ones. It is honest and scholarly, and the clearest of the three about sources.

PALETTE



C · Lantern Show

A darkened room and a magic-lantern evening. Photographs glow out of a deep field as you drift through time, closest in spirit to Histography. Selecting a photograph brings it forward, and its story is read beneath it like a lecture caption. It would have the most impact on first view.

PALETTE

documents carry all the age and texture. Each person's life is a fine line through time that lights up in lamp amber when you follow it.

PALETTE



TYPE

Gelasio, a sturdy Georgia-style serif, for everything that is read. Public Sans for every control and date.

DEFINING DEVICE

Lifelines: one line per person, a portrait at its start, knots for events and a fade where the record runs out.

MAIN RISK

Restraint can turn into blandness. It depends on good photographs, confident scale and the dark green and brown bands to give the page rhythm.



TYPE

Newsreader for entries, IBM Plex Mono for dates and folio numbers.

DEFINING DEVICE

The ruled entry: a date column, a margin rule and a numbered minute.

MAIN RISK

It is the research dashboard the brief rules out, and ruled paper drifts toward the faux-parchment look. It rewards scholars and loses the Facebook visitor.



TYPE

Bodoni Moda italic for names, Work Sans for captions.

DEFINING DEVICE

The glowing plate: photographs lit from behind in a dark field.

MAIN RISK

Darkness reads as a memorial and is hard on older eyes. Warm glow on black drifts into sepia nostalgia, and it is the hardest to make comfortable on a phone.

Why Plain Light

It is the only direction that comes from this specific place. Quaker plainness is a real testimony of simplicity, and the meeting house is a white building with green shutters, not a museum. Restraint here is the subject's own aesthetic. Plain Light also handles the brief's two hardest demands: someone arriving from Facebook understands it at once, and it can show uncertainty without looking broken.

WHAT THE BRIEF NEEDS	A · PLAIN LIGHT	B · MINUTE BOOK	C · LANTERN SHOW
Rewards curiosity in the first seconds	●●○ Good	●○○ Weak	●●● Strong
Clear for someone new to interactive sites	●●● Strong	●●○ Good	●○○ Weak
Separates record from interpretation	●●● Strong	●●● Strong	●○○ Weak
Works on a phone, from a Facebook link	●●● Strong	●●○ Good	●○○ Weak
Looks finished with a story of three photos	●●● Strong	●●○ Good	●○○ Weak
Avoids "old-timey" and AI-generic looks	●●○ Good	●○○ Weak	●○○ Weak

CHAPTER 2

Brand idea

The idea, the personality and the positioning.

Held in the Light

Friends speak of “holding someone in the Light,” meaning to keep them in mind with care. The site does the same for every person in the archive. Each life is drawn plainly, kept in view and treated with care. Where the record is dark, we say so.

This phrase has religious meaning for Friends. Ask Beth, and the meeting if she thinks it right, whether it is welcome as a public line. If not, keep it as an internal idea and use the positioning statement publicly.

POSITIONING

Drumore Friends is the lasting home for the stories of the Drumore Friends Meeting House and the families connected to it: a timeline you can walk through, from the Germantown ancestors to the people who still open its doors. Every photograph and date says where it came from.

Plain

Says it once, in ordinary words, at a comfortable size.

Not austere, not minimal for show.

Warm

Talks like Beth at the open house: “Here’s Nonie at about 10 or 11.”

Not folksy, not sentimental.

Exact

Dates, names and sources are precise, and so are the gaps.

Not academic or hedging.

Unhurried

Lets a photograph be looked at. Nothing pulls at you.

Not slow to load or slow to read.

CHAPTER 3

Visual principles

What must always be true across the site. Each has a test to apply to a screen.

Daylight, not age

The interface is limewash, plaster and daylight, with dark green and brown bands for rhythm. It never imitates paper, sepia or wear. Only the photographs and documents carry age.

Test: hide every image. If the screen still looks like 1890, it is wearing a costume.

The record is the ornament

No flourishes, borders or textures. A cabinet card’s mount, a minute book’s ruling and a diary’s handwriting are the decoration, shown whole and at a generous size.

Test: any decorative element that did not come from the archive should go.

Show the edges of what we know

Every date shows its precision and every claim shows its evidence. Lines fade where the record runs out. Uncertainty is drawn with the same care as fact.

Test: can a visitor tell “recorded,” “reported” and “family story” apart without reading a help page?

One room, many doors

Timeline, family tree, person, story and place are views of the same things. Moving between them never loses your place, and there is always a single way back.

Test: from any screen, can you get back to the year you started from in one tap?

Plain speech

Controls say what they do: “Follow her life,” “See the original,” “Where was this?”

Test: would Beth’s oldest reader know what every button does?

CHAPTER 4

Color

Measured from the meeting house: limewash, shutters, benches, the river and lamp light.

Core

Page ground

Limewash
#F1F2EE
Every page. A cool, slightly green white. Never cream.

Surfaces

Plaster
#FBFBF8
Story column, cards, image mats.

Brand · dark band

Shutter
#17302B
Wordmark, headings, nav bar, era headers, footer. Measured from the shutters.

Second dark band

Bench
#3A2A1F
Quotation and diary bands, the story-end band. From the walnut benches.

Text

Ink
#1C2321
Body text, with Pewter #59645F for captions.

Meaning

These colors carry information, so they are never decorative. Each is always paired with a shape or a word.

■ Original

Walnut
#6E4229
Marks originals: photographs and documents from the time. Scene dates.

◇ Drawn

River
#2E6273
Marks new work: illustrations, transcriptions, diagrams. Water on maps.

● Selected

Lamp
#E3A33B
The one person or year you're following. Fills and lines only.

Dimmed

Mist
#C9D0CB
Unselected lifelines and tree links.

Viewer

Night
#121816
Only behind the source viewer, so scans read true.

Bands break up the page

The site is light, but not all white. Dark bands mark the frame and the special moments. Shutter green holds the navigation, era headers and footer. Bench brown is saved for words from the past: a diary line, a letter, a minute.

Drumore Friends Timeline Family Places

Diaries and reunions

1866–1916 · 14 stories · 31 people

"How time flies! In a few years I may read this over, and refresh my memory."

Wynona Lamborn, diary, 12 Oct 1890

Wynona started her diary on her twenty-second birthday and wrote in it every day until May 1891…

Drumore Friends Meeting House · Drumore Township, PA About the archive · Suggest a correction

Proportion on a typical screen

Lamp is the smallest share on purpose. If more than one thing on a screen is amber, the screen has lost its focus.

Pairings

1816
Shutter on Limewash · 12.5 : 1

Follow her life
Plaster on Shutter · 13.6 : 1

"How time flies!"
Plaster on Bench · 13.2 : 1

You are here
Lamp on Shutter · 6.4 : 1

Contrast

FOREGROUND	ON LIMEWASH	ON PLASTER	USE
Ink	14.2 AAA	15.4 AAA	All body text
Shutter	12.5 AAA	13.6 AAA	Headings, links, buttons
Walnut	7.6 AAA	8.2 AAA	Scene dates, Original labels
River	6.0 AA	6.5 AA	Drawn labels
Pewter	5.5 AA	5.9 AA	Captions at 13px and up
Lamp	1.9 fails	2.1 fails	Never text on light. Lines, halos, fills. On Shutter 6.4 and on Bench 6.3 it passes.

CHAPTER 5

Typography

One sturdy serif, one plain sans, and a readable handwriting face used only for transcriptions. All are free (SIL Open Font License) and on Google Fonts.

Gelasio

Names, titles, stories, quotations: everything that is read. Regular for display, Medium for small headings. Never thin at any size.

Fallback: Georgia

Jessie Wynona Lamborn

Gelasio · text

19px on 1.62 for stories, 60–66 characters a line. True italics for quotations.

Gelasio was drawn to match Georgia’s proportions, the serif Beth’s readers already see in every email and newspaper site. It has even strokes, open letters and no hairlines, so it stays easy to read at any size and on any phone. And because it matches Georgia, the page doesn’t jump when the web font arrives.

Public Sans

Every control, label, date and caption. Tabular figures for dates.

Fallback: system UI

Follow her life · See the original · 12 Oct 1890 · Back to 1890

Kalam

Only on Drawn transcription cards, beside the original (chapter 8). Option B is Petrona Italic. Never for interface or headings.

Fallback: cursive

To-day has been dull and rainy, the leaves falling.

Scale

Display · Gelasio 400	Wynona Lamborn	54 / 1.0 · phone 38
Title · Gelasio 400	The diary begins	36 / 1.05 · phone 28
Section · Gelasio 500	Scenes from her life	24 / 1.15
Story · Gelasio 400	She lived with Aunt Alice during the week and went home to Fernglen on weekends.	19 / 1.62 · 60–66 characters
UI · Public Sans 500	Timeline · Family · Places · Stories	16 / 1.4
Date · Public Sans 600	12 Oct 1890	15 · tabular · Walnut
Caption · Public Sans	Cabinet card, about 1890. Archive post P045.	14 / 1.45 · Pewter
Label · Public Sans 700	ORIGINAL · DRAWN · TODAY	11.5 · +0.14em caps

Minimum sizes: stories 18px on phones, captions 14px, labels 11.5px in tracked capitals only. Many of Beth’s readers are older, so when in doubt go a step larger. Avoid high-contrast display serifs (Caslon Display, Playfair, Didone faces). Their hairlines disappear at small sizes.

Writing dates

WHAT WE KNOW	SHOW	RULE
The day	**12 Oct 1890**	Day, short month, year. No ordinals, no weekday.
Written in Quaker form	**9 Nov 1811**	Then, in the viewer and on hover: *as written: “9th of 11th month, 1811.”* Always keep the original.
Before 1752 (Old Style)	**19 Sept 1746 ⚑**	Flag until checked. Before 1752, “9th month” meant November.
Month or year only	**Nov 1890 · 1816**	Never pad to a fake day like “1 Jan 1816.”
Approximate	**about 1870**	Write “about,” not “c.”
A span	**1861–1865**	En dash, no spaces. Uncertain bounds: “between 1853 and 1858.”
Sources disagree	**1872 or 1874**	Show both and link each source.

Quotations

> *“Let thy religion be simple, plain, and full of love for thy fellow mortals.”*
>
> Will Lamborn to his daughter, 1873, as quoted in archive post P035.

Keep the original spelling and punctuation. Don’t add [sic]. A quotation always links to its scan.

Long stories


- One column, 60–66 characters a line, 19px. Never multiple columns.
- Break the story into scenes at every new date, each with a Walnut date line.
- A picture, quotation or source card every three to five paragraphs.
- Plain Gelasio headings. No drop caps or ornaments.
- Footnotes become source cards in the margin on desktop and tappable markers on phones.

CHAPTER 6

The mark


The Gable Line. Approved in direction; refine only line weights and the smallest sizes.

One line runs along the ground, rises into the meeting house roof and runs on, like a building standing on a timeline. The two small windows are the gable-end shutters. It is traced from the building itself, so it is the meeting house, simplified until it could be drawn with one stroke.

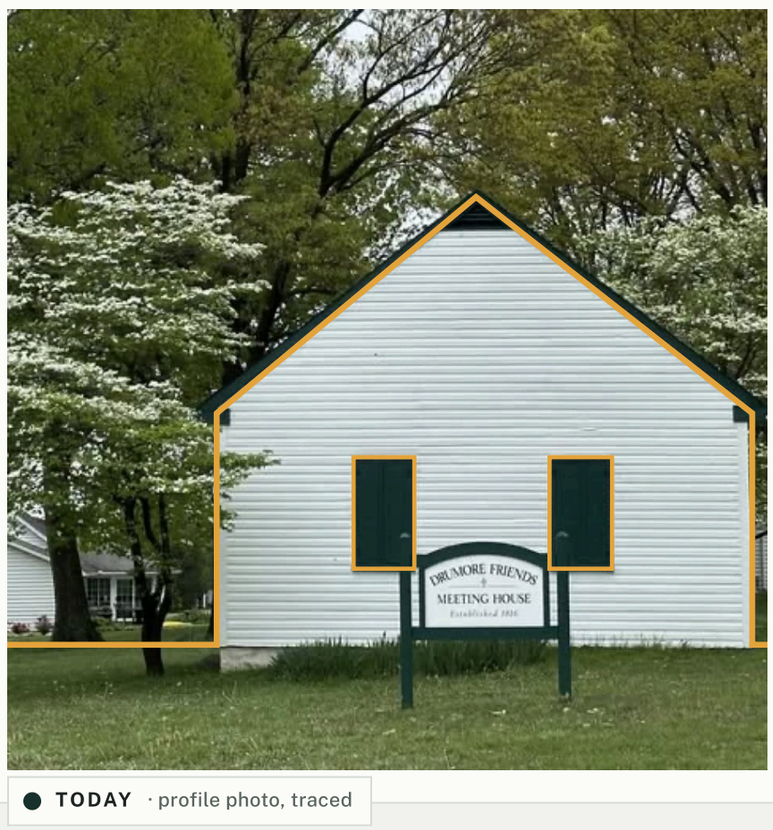

● **TODAY** · profile photo, traced

How it was found. The amber line traces the photograph: ground, walls, roof, the two shuttered windows. Wall height is 0.43 of the width and the roof rise is 0.81 of the half-width (about a 39° pitch).

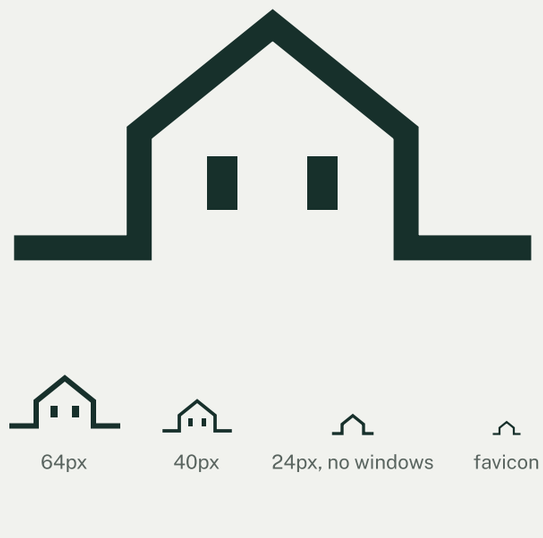

Why it works


It’s literal without being a picture. Anyone who has stood at the gable end recognizes it, and anyone who hasn’t still reads “a plain building on a line through time.”

Why the windows matter


Two windows give the house a face. That small bit of personality makes it friendly rather than corporate, and it’s what makes it this meeting house rather than any house.

Why one line


The ground line continues past the house on both sides. It is the same line as the timeline, so the logo already says what the site does.

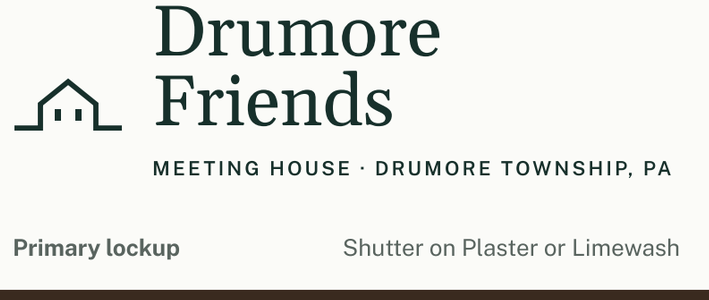


Primary lockup — Shutter on Plaster or Limewash

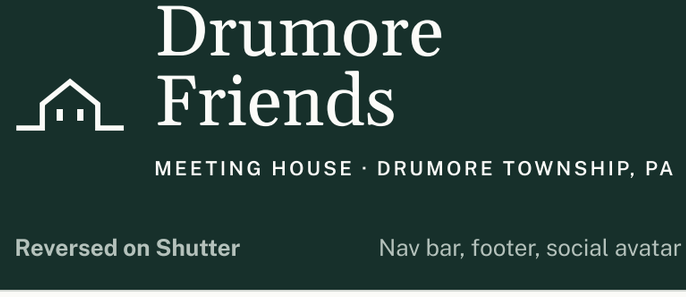

Reversed on Shutter — Nav bar, footer, social avatar

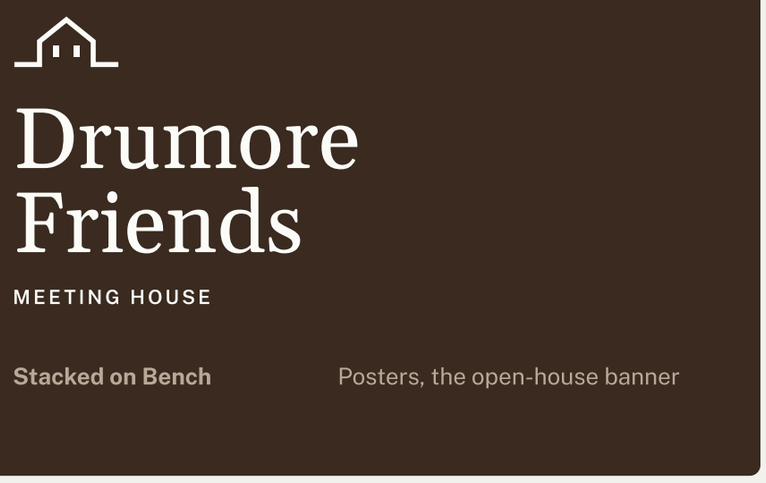

Stacked on Bench — Posters, the open-house banner

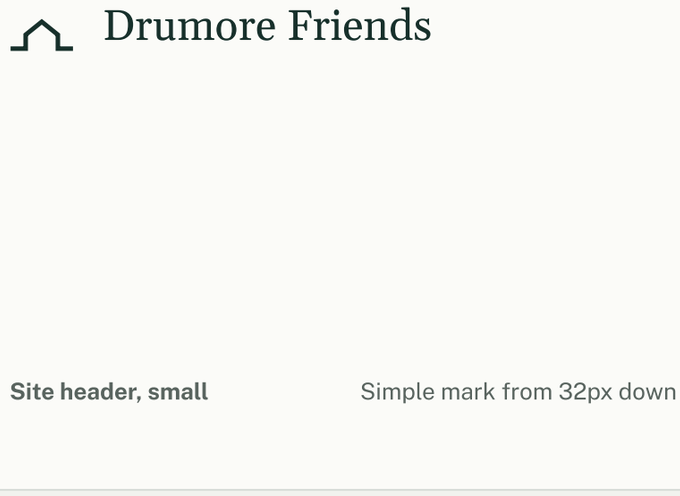

Site header, small — Simple mark from 32px down

Rules

Clear space

Keep space equal to the roof rise on every side. Only Shutter, Plaster, Limewash or Bench behind it.

“Established 1816”

The sign carries it, but the curation notes still ask for its source. Add it to the lockup once Beth confirms.

Name check

Confirm “Meeting House” or “Meetinghouse,” and whether the site is simply “Drumore Friends,” before final artwork or a domain.



Avoid · Quills, scrolls, flourishes, swashes.



Avoid · Parchment, sepia or aged textures behind it.



Avoid · Lamp amber. Amber means “selected.”



Avoid · A cross, steeple or dove. Friends meeting houses have none.

CHAPTER 7

Photographs and documents

Show originals whole and true. Mark anything new as new.

The provenance tab

Every image sits on a plain mat with a small tab on its lower edge. The tab answers one question before any caption:

what am I looking at?

ORIGINAL

A photograph, document or object from the time, shown as found. Solid frame. Square Walnut marker.

DRAWN

Anything made now: illustrations, transcriptions, reconstructions, maps. Dashed River frame. Always says who made it and from what.

TODAY

Recent photographs: open houses, the cemetery, preservation work. Round Shutter marker. Always dated.




ORIGINAL · photograph

Portraits: show the whole card. The mount, studio name and edge wear are evidence of date and place. Crop to the face only in small tokens. Archive P045, Jessie “Wynona” Lamborn.



ORIGINAL · photograph · 1910 or 1912


Group photographs: let people be found. Show the full frame, then a numbered key of who is identified. Mark tentative identifications separately. Archive P080: the caption says 1910 and the event list says 1912, so both are shown.

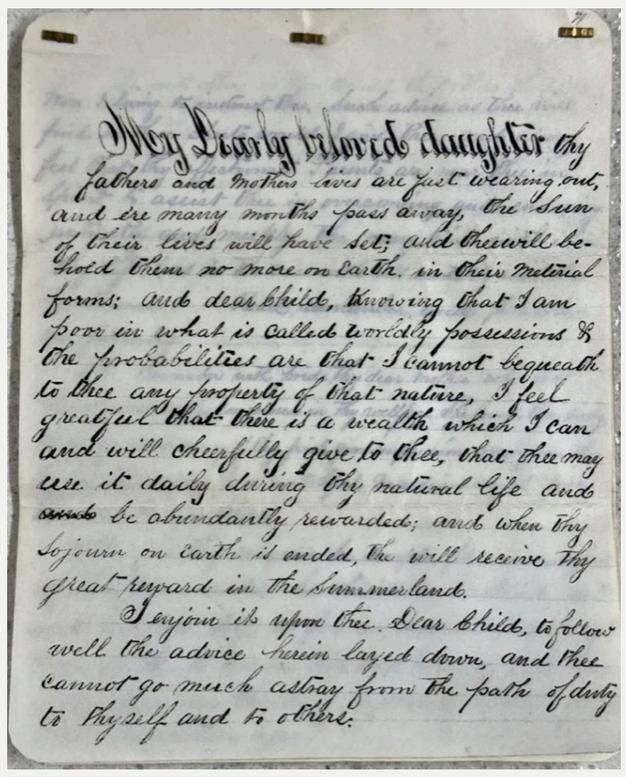

My Dearly beloved daughter thy
fathers and mothers lives are fast wearing out,
and ere many months pass away, the Sun
of their lives will have set; and thou will be-
hold them no more on earth. in their material
forms; and dear child, knowing that I am
poor in what is called worldly possessions &
the probabilities are that I cannot bequeath
to thee any property of that nature, I feel
greatful that there is a wealth which I can
and will cheerfully give to thee, that thee may
use it daily during thy natural life and
~~and~~ be abundantly rewarded; and when thy
sojourn on earth is ended, thou will receive thy
great reward in the Summerland.
I enjoin it upon thee. Dear Child, to follow
well the advice herein layed down, and thee
cannot go much astray from the path of duty
to thyself and to others.

ORIGINAL · letter, 1873

Documents: the whole page first, then the detail. Pair every handwritten page with a transcription (chapter 8). Archive P035, Will Lamborn’s letter to his daughter.

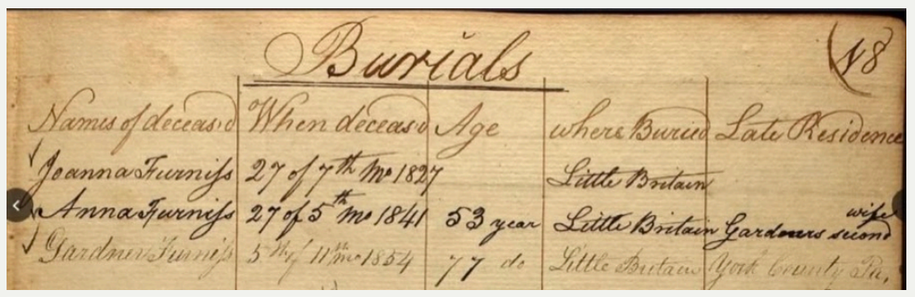

Burials 18

Names of deceased	When deceased	Age	where Buried	Late Residence
Joanna Furnis	27 of 7th Mo 1827		Little Britain	
Anna Furnis	27 of 5th Mo 1841	53 years	Little Britain	Gardners wife second
Gardner Furnis	5th of 11th Mo 1854	77 do	Little Britain	York County Pa,

ORIGINAL · minute book

Scan straight, light evenly, keep the color. Don’t push contrast until the paper turns white. Archive P029, Little Britain Monthly Meeting burials.



TODAY · open house, 2026

Today photographs: natural color and light. They are the living end of every timeline. No filters or black-and-white conversions. Archive P107.

Caption pattern

ORIGINAL · PHOTOGRAPH

Wynona Lamborn and Early Earnhart on their wedding day

8 Dec 1892 · Studio portrait · Archive post P064 · Both identified by Beth

Order: what it shows · when · what kind of object · where it is held · how sure the identification is. Captions stay live text.

No portrait? No invented face.

WL

Will Lamborn: initials

No photograph identified yet

Said plainly


Never generate a likeness with AI, never colorize and never use AI face upscaling. Upscalers invent eyes, mouths and age.

CHAPTER 8

Handwriting and transcription

Every handwritten page appears beside a version anyone can read.

Wynona’s diary and Will’s letter are the heart of the archive, and most visitors can’t read 1890s cursive. So the original always sits next to a transcription: a drawn card on ruled paper in a modern handwriting face, and a plain-text version for reading, searching and screen readers.

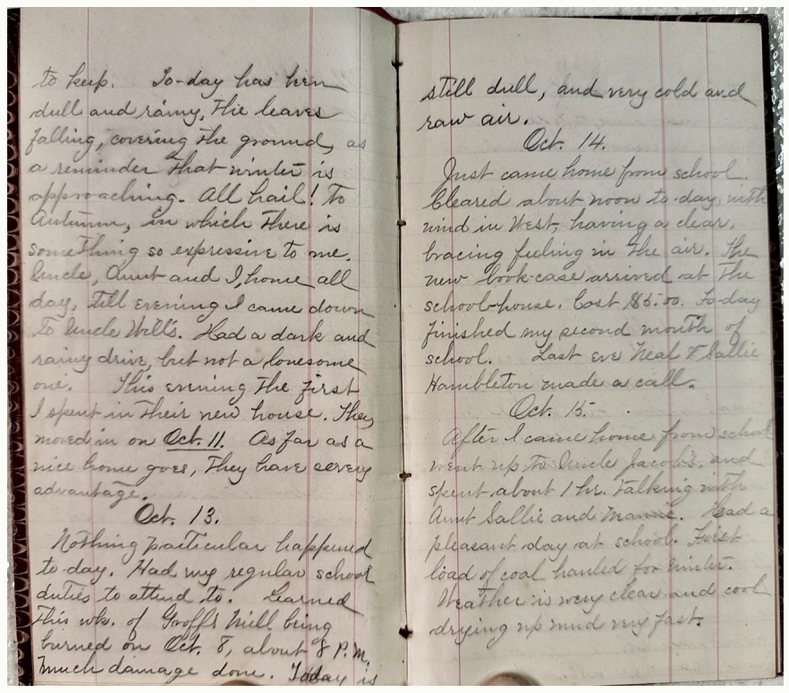
to keep. To-day has been dull and rainy, the leaves falling, covering the ground, as a reminder that winter is approaching. All hail! To Autumn, in which there is something so expressive to me. Uncle, Aunt and I, home all day, till evening I came down to Uncle Wills. Had a dark and rainy drive, but not a lonesome one. This evening the first I spent in their new house. They moved in on Oct. 11. As far as a nice home goes, they have every advantage.

Oct. 13.

Nothing particular happened to day. Had my regular school duties to attend to. Learned this wk. of Groff's Mill being burned on Oct. 8, about 8 P.M. Much damage done. Today is

still dull, and very cold and raw air.

Oct. 14.

Just came home from school. Cleared about noon to-day, with wind in West, having a clear, bracing feeling in the air. The new book-case arrived at the school-house. Cost $6.00. To-day finished my second month of school. Last eve Neal & Sallie Hambleton made a call.

Oct. 15.

After I came home from school went up to Uncle Jacob's and spent about 1 hr. talking with Aunt Sallie and Mamie. Had a pleasant day at school. Got load of coal hauled for winter. Weather is very clear and cool drying up mud very fast.

ORIGINAL · diary, Oct 1890

Wynona's diary, 12–15 Oct 1890. Archive post P045. The book now belongs to the Solanco Historical Society (P074).

... to keep. To-day has been dull and rainy, the leaves falling, covering the ground, as a reminder that winter is approaching. All hail! To Autumn, in which there is something so expressive to me. Uncle, Aunt and I, home all day, till evening I came down to Uncle Will's. Had a dark and rainy drive, but not a lonesome one.

Oct. 14.

Just came home from school. Cleared about noon to-day, with wind in West, having a clear, bracing feeling in the air. The new book-case arrived at the school-house. Cost $6.00.

DRAWN · transcription, 2026

Transcription card. Blue-ruled paper with a red margin, echoing her notebook, and text that sits on the lines. Switch between the two handwriting options above. Always labeled Drawn.

Plain text, with the editor visible

12 Oct 1890 · continued

... Uncle, Aunt Thomas and Lib Hambleton and I, home all day, till evening I came down to Uncle Will's William L. Shoemaker. Had a dark and rainy drive, but not a lonesome one. This evening the first I spent in their new house. They moved in on Oct. 11. As far as a nice home goes, they have every advantage.

13 Oct 1890

Nothing particular happened to-day. Had my regular school duties to attend to. Learned this wk. of Groff's Mill being burned on Oct. 8, about 8 P.M. Much damage done.

Her words

"Uncle Will's"

Gelasio, exactly as written: spelling, capitals, "to-day."

Our notes

William L. Shoemaker

Editorial additions use a River tag in sans, never brackets that look like hers.

Unsure reading

Groff's Mill

Dotted underline. Hover or tap shows the other possible readings.

Crossed out

and ~~and~~ be abundantly

Strike-through, kept. A slip of the pen is part of the page.

Choosing the handwriting face

All hail! To Autumn, in which there is something so expressive to me.

A · Everyday hand (Kalam). A relaxed, slanted print hand. The easiest to read, and the friendliest. Recommended.

All hail! To Autumn, in which there is something so expressive to me.

B · Chancery hand (Petrona Italic). A pen-drawn italic, closer to a 19th-century copybook, with no thin hairlines. For Beth to compare.

All hail! To Autumn, in which there is something so expressive to me.

Avoid · joined script. Looks the most "old," but loops and joins slow every reader down. The originals already show the real hand.

How transcriptions get made

- Claude reads the scan and drafts the transcription, marking any word it isn't sure of.
- Beth checks the draft against the page and resolves the marked words.
- Names get editorial tags linking to the person's page and family tree.
- Each transcription records who checked it and when.

Tested on this archive

Claude transcribed the diary spread above and Will's 1873 letter. On the diary, its reading matched the transcription Beth posted in P045 word for word, except for one word she had dropped ("moved in **on** Oct. 11"). Clear 1890s hands transcribe well. Faded pencil, 1700s minutes and damaged pages will need more of Beth's eye.

CHAPTER 9

Time, people, places and doubt

One visual vocabulary for events, lives, connections and uncertainty, shared by the timeline, the family tree and the map.

HOW SURE: THE MARKER

Recorded
An original we have seen: minute, diary, deed, census

Reported
From an account: Beth's posts, a county history, an obituary

Family story
Remembered and passed down, no record found yet

Selected Lamp halo, any marker

HOW PRECISE: THE SPAN

12 Oct 1890 · the day

Nov 1890 · 1879 · month or year

about 1870


between 1853 and 1858

before 1816

or

1872 or 1874 · sources disagree

PEOPLE: LIFELINES AND LINKS

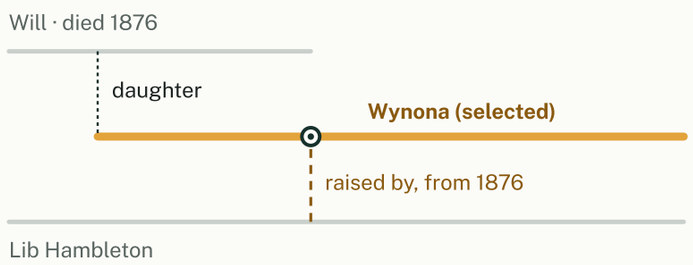

Line = a life · knot = an event · dotted = parent · dashed = raised by. Links

PLACES: HOW EXACT THE LOCATION IS

Building · the meeting house, Fernglen Store

Parcel · a farm from a deed or survey


Community · "near Liberty Square"

Region · "somewhere in Fulton Township"

CHAPTER 10

Maps

The timeline laid flat: same markers, same amber, same rules about certainty.

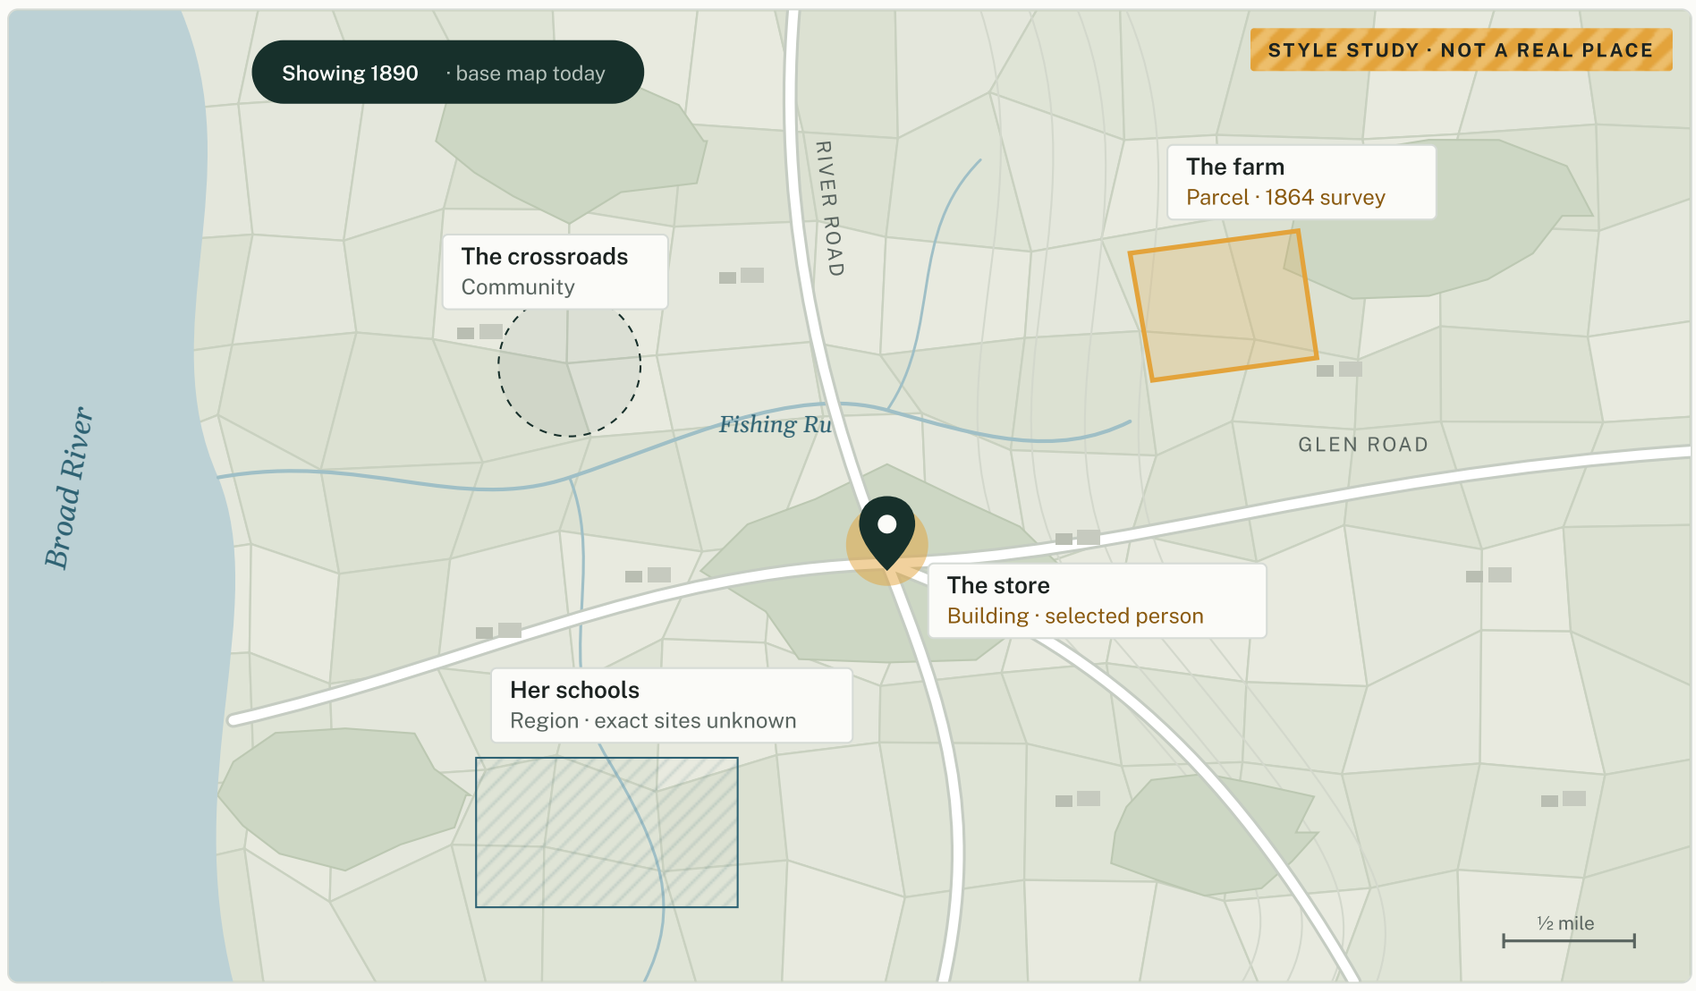

Styling


- Fields in two near tones (#E4E7DC, #DCE1D2) with hedgerow edges. The farmland is the texture.
- Woods #CDD7C4, water #BCD1D5. Flat, with no terrain shading or satellite imagery.
- Water names in Gelasio italic, everything else in Public Sans.

Time on the map

The map always says which year it shows and what the base map is. Historic maps are opt-in overlays labeled Original with their date. Moving the year only changes features that have a source for that year.

Map and timeline share

The same evidence markers, the same amber for the selected person's places, and one "Showing 1890" chip that drives both. Opening the map from a scene shows the return pill.

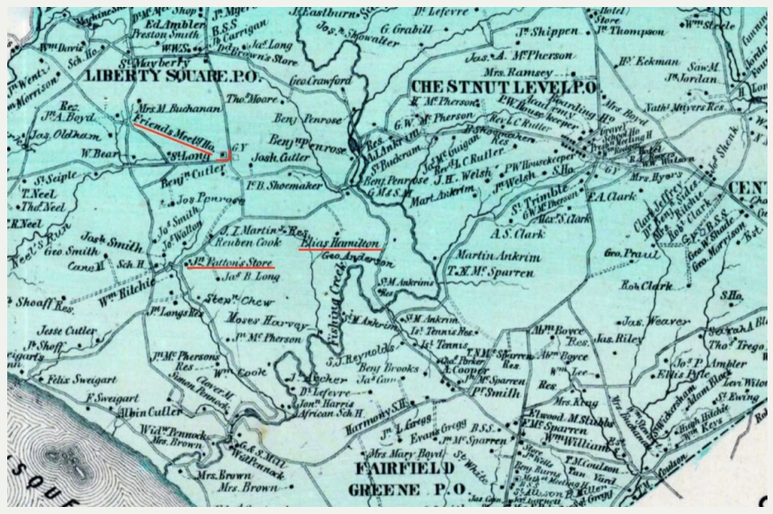

ORIGINAL · Drumore map, 1864

The real source. Beth already has the 1864, 1875 and 1899 Drumore maps (P140). The site's maps are traced from these and the county GIS, not invented.

Making the real maps

1. **Geography from records.** In Figma, trace roads, streams and township lines from Lancaster County GIS. Place historic features from the 1864, 1875 and 1899 maps.
2. **Style from prompts.** Use image generation only for texture and illustration style (field patterns, tree clusters, building pictograms), never for where things are.
3. **Apply the tokens.** Swap every color to the map tokens and export one SVG layer per era.
4. **Label it Drawn.** Every map carries a Drawn tab: "Drawn 2026, from the 1864 Bridgens map and county GIS."

Image prompts for map art

1 **Field texture**

Top-down flat illustration of rolling southeastern Pennsylvania farmland, irregular field quilt in two very pale sage tones (#E4E7DC, #DCE1D2), thin darker hedgerow lines between fields, no roads, no labels, no text, no shading, no perspective, quiet museum wayfinding style, seamless tile.

2 **Woods and trees**

Set of small flat top-down woodland clusters and single trees for a map, soft muted green #CDD7C4 with slightly darker #B9C6AE edges, simple organic shapes, no outlines, no shadows, transparent background, consistent scale.

3 **Building pictograms**

Set of tiny single-weight line pictograms in #2E6273 on white: a plain gable-roof meeting house with two windows, a general store with porch, a farmhouse with bank barn, a one-room schoolhouse, a grist mill by a stream. 2px line, square ends, no fill, no shading, consistent 48px grid.

4 **River edge**


Flat top-down illustration of a wide river edge with gentle wooded banks, water in pale blue-grey #BCD1D5, banks in #CDD7C4, no ripples, no highlights, no boats, no text, calm and minimal.

CHAPTER 11

Family tree

The tree is the timeline's twin: the same people, arranged by relationship instead of by year. Select anyone to see how they connect to Wynona. Every relationship comes from Beth's posts and still needs checking.

■ ARCHIVE EXAMPLE · AS DESCRIBED IN BETH'S POSTS

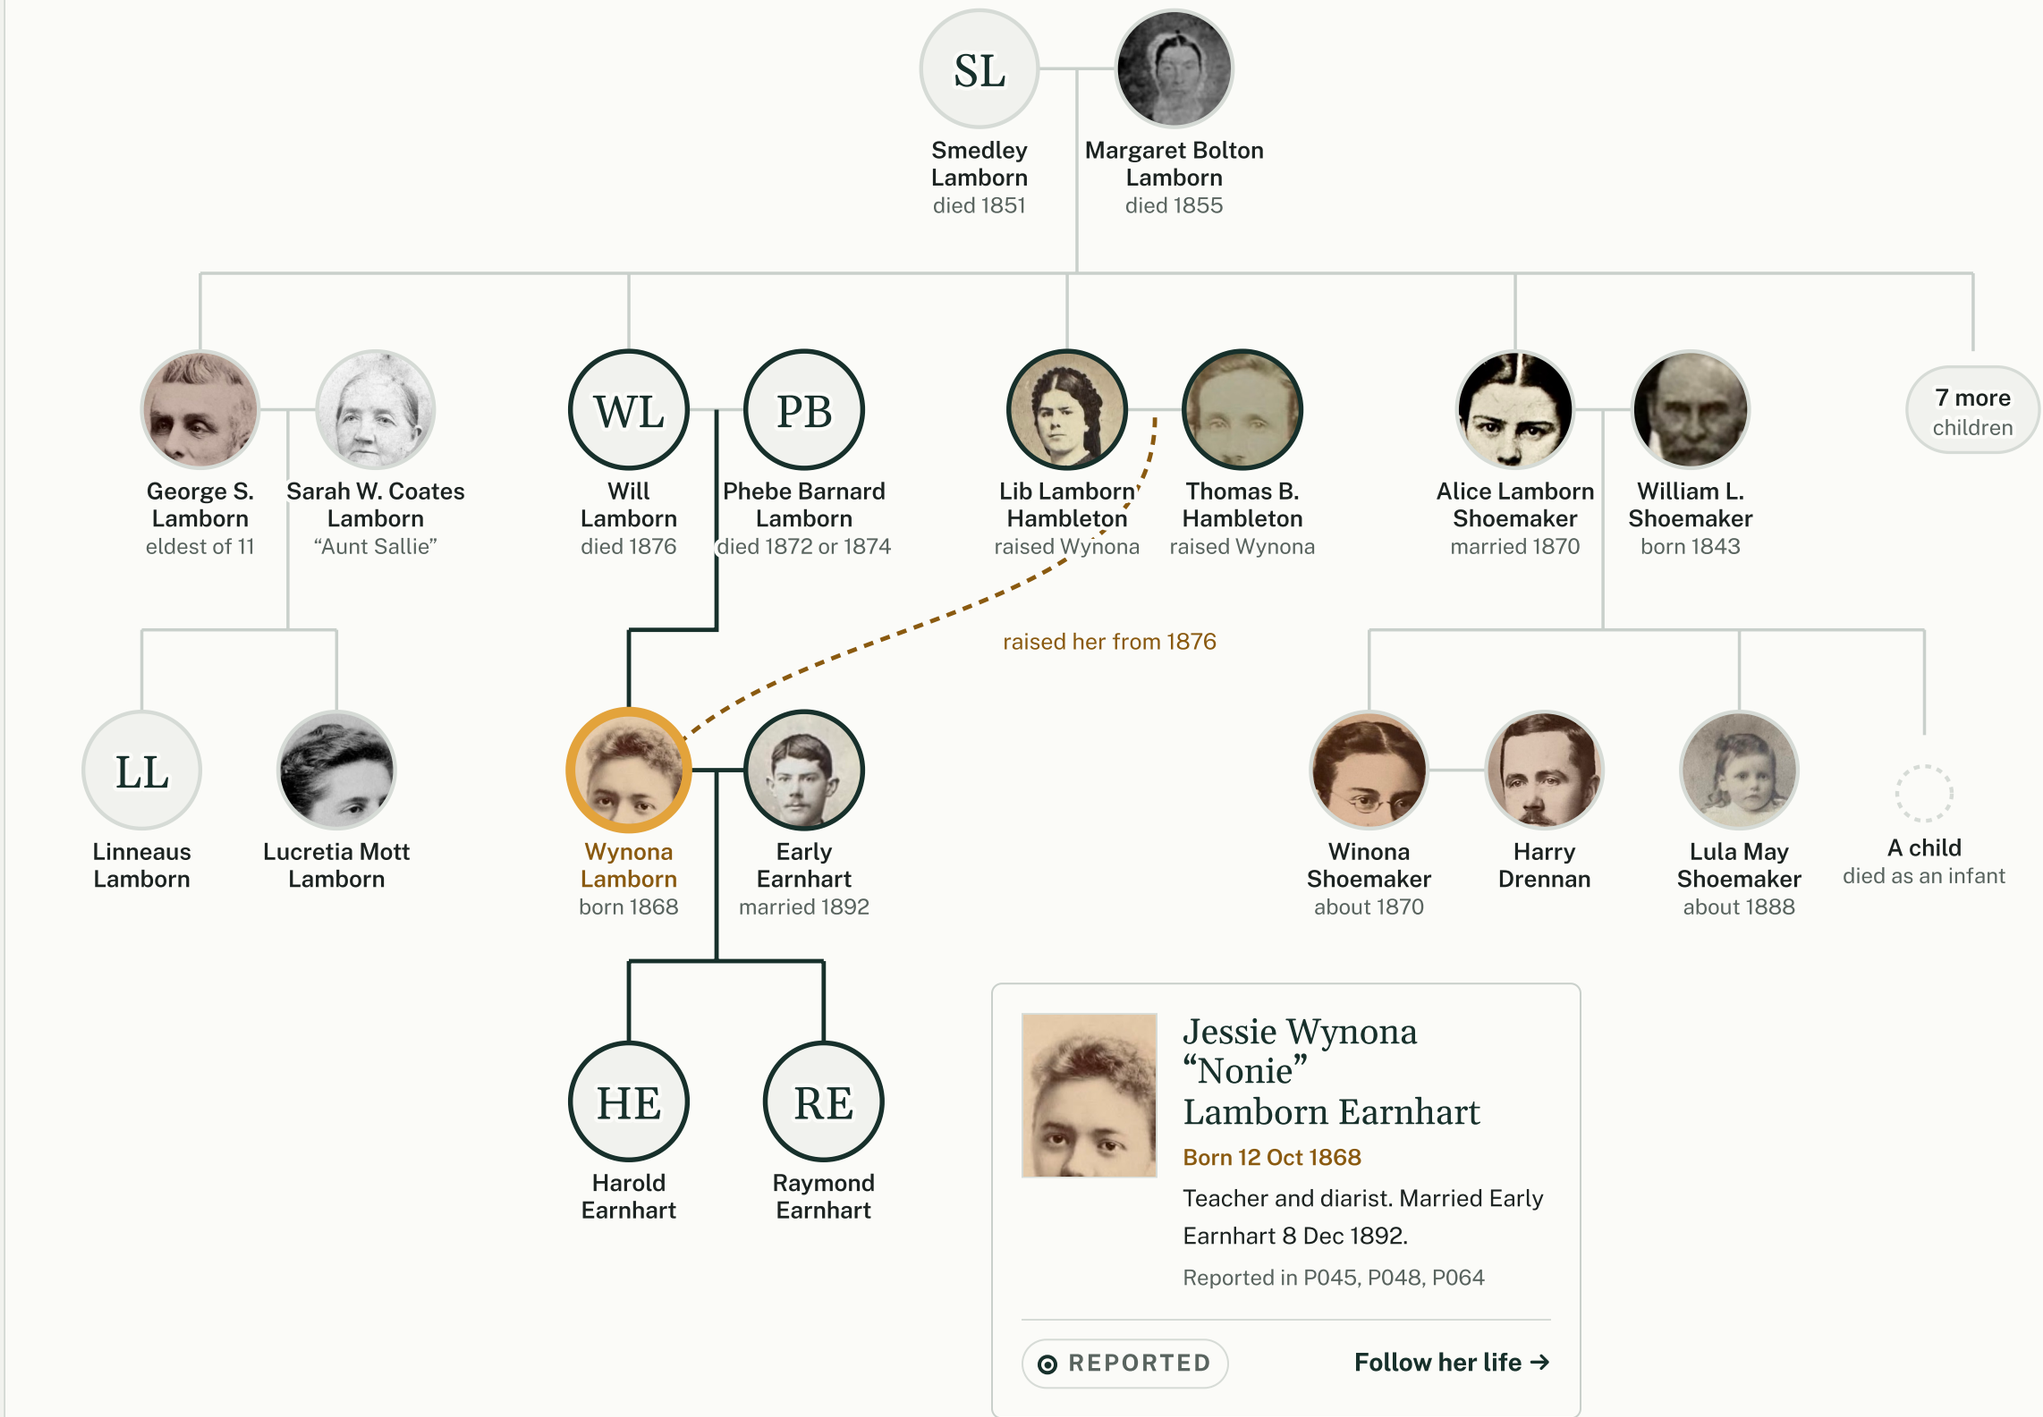

Jessie Wynona “Nonie” Lamborn Earnhart

Born 12 Oct 1868

Teacher and diarist. Married Early Earnhart 8 Dec 1892.

Reported in P045, P048, P064

REPORTED

Follow her life →

— parent and child, or married - - - raised by, not born to Faces are archive portraits. Initials mean no photograph has been identified.

Real families aren't tidy

Wynona was raised by her aunt and uncle, and Alice by the Cutlers. “Raised by” is its own dashed link, never forced into a parent line.

Large families fold

Smedley and Margaret had eleven children. The tree shows the four Wynona writes about most, and “7 more” opens the rest.

Gaps are shown

The child Alice lost as an infant appears as a small dashed node: “name not yet in the archive.” Missing people stay visible.

CHAPTER 12

Core interface elements

Built here in HTML and CSS with the book's tokens, using archive material.

NAVIGATION · SHUTTER BAND

Drumore Friends Timeline Family Places Stories Search names, places, years


Four nouns and search, on a Shutter band. On phones the nouns become a labeled bottom bar, never a hamburger menu.

ERA SELECTOR

Before th…	Ancestors	Settling Drum…	The meeting …	War years	Diaries and reunions	Remembering
to 1682	1683–1794	1795–1816	1817–1860	1861–1865	1866–1916	1917–today


Segment width equals the era's width on the timeline. Draft eras for Beth to rename. Arrow keys move and Enter travels.

EVENT MARKER



12px mark in a 44px hit area. Shape carries evidence; these are “Reported.”

PERSON PORTRAIT



Wynona Lamborn

born 1868

WL

Will Lamborn

died 1876

Married women show their full name on their page. Initials when no photograph is identified.

RETURN TO TIMELINE



Always bottom-left. Names the year and person you came from, and restores the same zoom and selection.

STORY CARD



12 Oct 1890 – 12 May 1891


Wynona’s diary year

Every day for seven months: school at Conowingo, weekends at Fernglen, and the people of southern Lancaster County.

REPORTED · 9 scenes · 14 posts

The doorway into a story wherever it appears. Fixed parts: date in Walnut, Gelasio title, one sentence, evidence chip, counts.

MAP PIN




Only building-level places get a pin.

SOURCE VIEWER

ORIGINAL · LETTER

Page | Both | Text

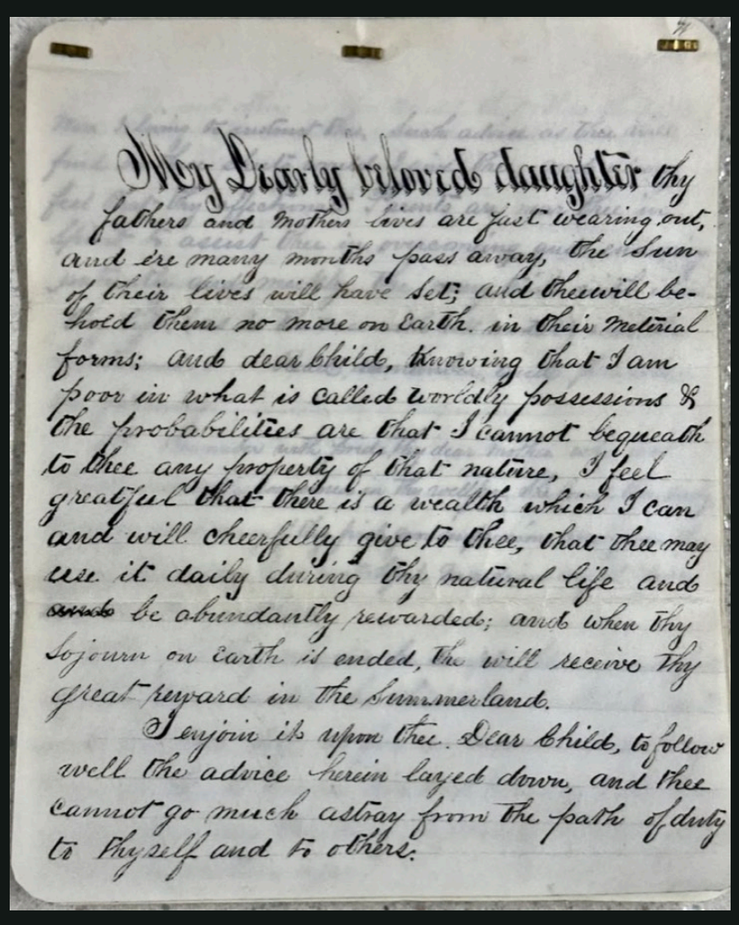
My Dearly beloved daughter thy fathers and Mothers lives are just wearing out, and ere many months pass away, the Sun of their lives will have set; and thee will behold them no more on Earth in their Material forms; and dear Child, knowing that I am poor in what is called worldly possessions & the probabilities are that I cannot bequeath to thee any property of that nature, I feel greatful that there is a wealth which I can and will cheerfully give to thee, that thee may use it daily during thy natural life and ~~and~~ be abundantly rewarded; and when thy sojourn on earth is ended, thee will receive thy great reward in the Summerland.

I enjoin it upon thee Dear Child, to follow well the advice herein layed down, and thee cannot go much astray from the path of duty to thyself and to others.

Pinch or scroll to zoom

Page 1 of 3

TRANSCRIPTION

My Dearly beloved daughter thy fathers and Mothers lives are just wearing out, and ere many months pass away, the Sun of their lives will have set; and thee will behold them no more on Earth in their material forms; and dear Child, knowing that I am poor in what is called worldly possessions & the probabilities are that I cannot bequeath to thee any property of that nature, I feel greatful that there is a wealth which I can and will cheerfully give to thee, that thee may use it daily during thy natural life and ~~and~~ be abundantly rewarded …

From	William Lewis “Will” Lamborn to Wynona
Date	1873, as given in post P035
Source	Archive post P035, page 1 of 3
Status	Draft by Claude · awaiting Beth’s check

WHAT IT ADDS

He writes of both parents’ lives “wearing out.” If the letter is from 1873, Phebe was still living then, which fits the 1874 death date in P057 better than “when she was 3” in P035.

The only Night surface in the system, so scans read true. Image and transcription side by side on desktop; on phones the transcription is a sheet that slides up.

CHAPTER 13


Motion, desktop and phone

Movement explains where you are. The phone layout comes first.

What moves, and why

- **Selection.** The chosen lifeline or tree branch brightens to Lamp and the rest fade to Mist.
- **Travel.** Jumping to a year pans the field there, capped at 420ms.
- **Opening.** A card grows into its story from where it sat and shrinks back on return.
- **Nothing else.** No parallax, scroll-triggered reveals, autoplay or Ken Burns pans on photographs.

Try it

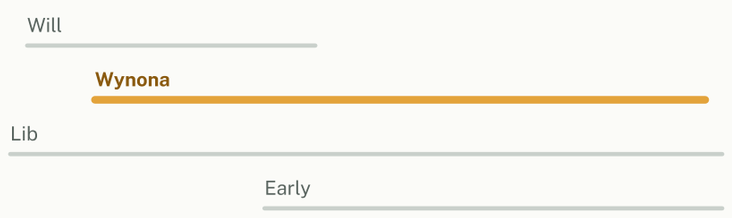

Tap a line, or use Tab and Enter. With reduced motion on, the change is instant.

TOKEN	DURATION	USED FOR	REDUCED MOTION
--t-quick	140ms	Hover, focus, pressed	Instant
--t-move	240ms	Selection, dimming, panels	Instant
--t-travel	420ms max	Panning to a year or era	Cut with a 120ms crossfade
--ease	cubic-bezier(.2,.7,.2,1)	Everything, eased out, no bounce	n/a

Phone · 360–767px

- **Time runs down the screen.** Lifelines are vertical threads at the left edge, with cards in one column.
- The era selector is a sticky chip row. The current era stays visible.
- The family tree shows one person at a time: parents above, children below.
- Stories open full-screen with real URLs, and the return pill sits bottom-left.
- Bottom bar: Timeline · Family · Places · Stories. Tap targets are 44px or larger.

Desktop · 1024px and up


- **Time runs across.** Family lanes are labeled at the left, with the selected person’s card docked at the right.
- “Follow her life” opens the person page beside a narrowed timeline.
- The whole family tree is visible, with the card docked in a corner.
- Stories are a 64-character column with sources in the margin.
- The map can split the screen with the timeline, with one year chip driving both.

CHAPTER 14

Two page concepts

The main timeline and one person’s story, built from Wynona Lamborn’s thread in Beth’s posts. Click a lifeline or portrait to follow someone else. “Follow her life” jumps to her page.

The main timeline, zoomed to one era

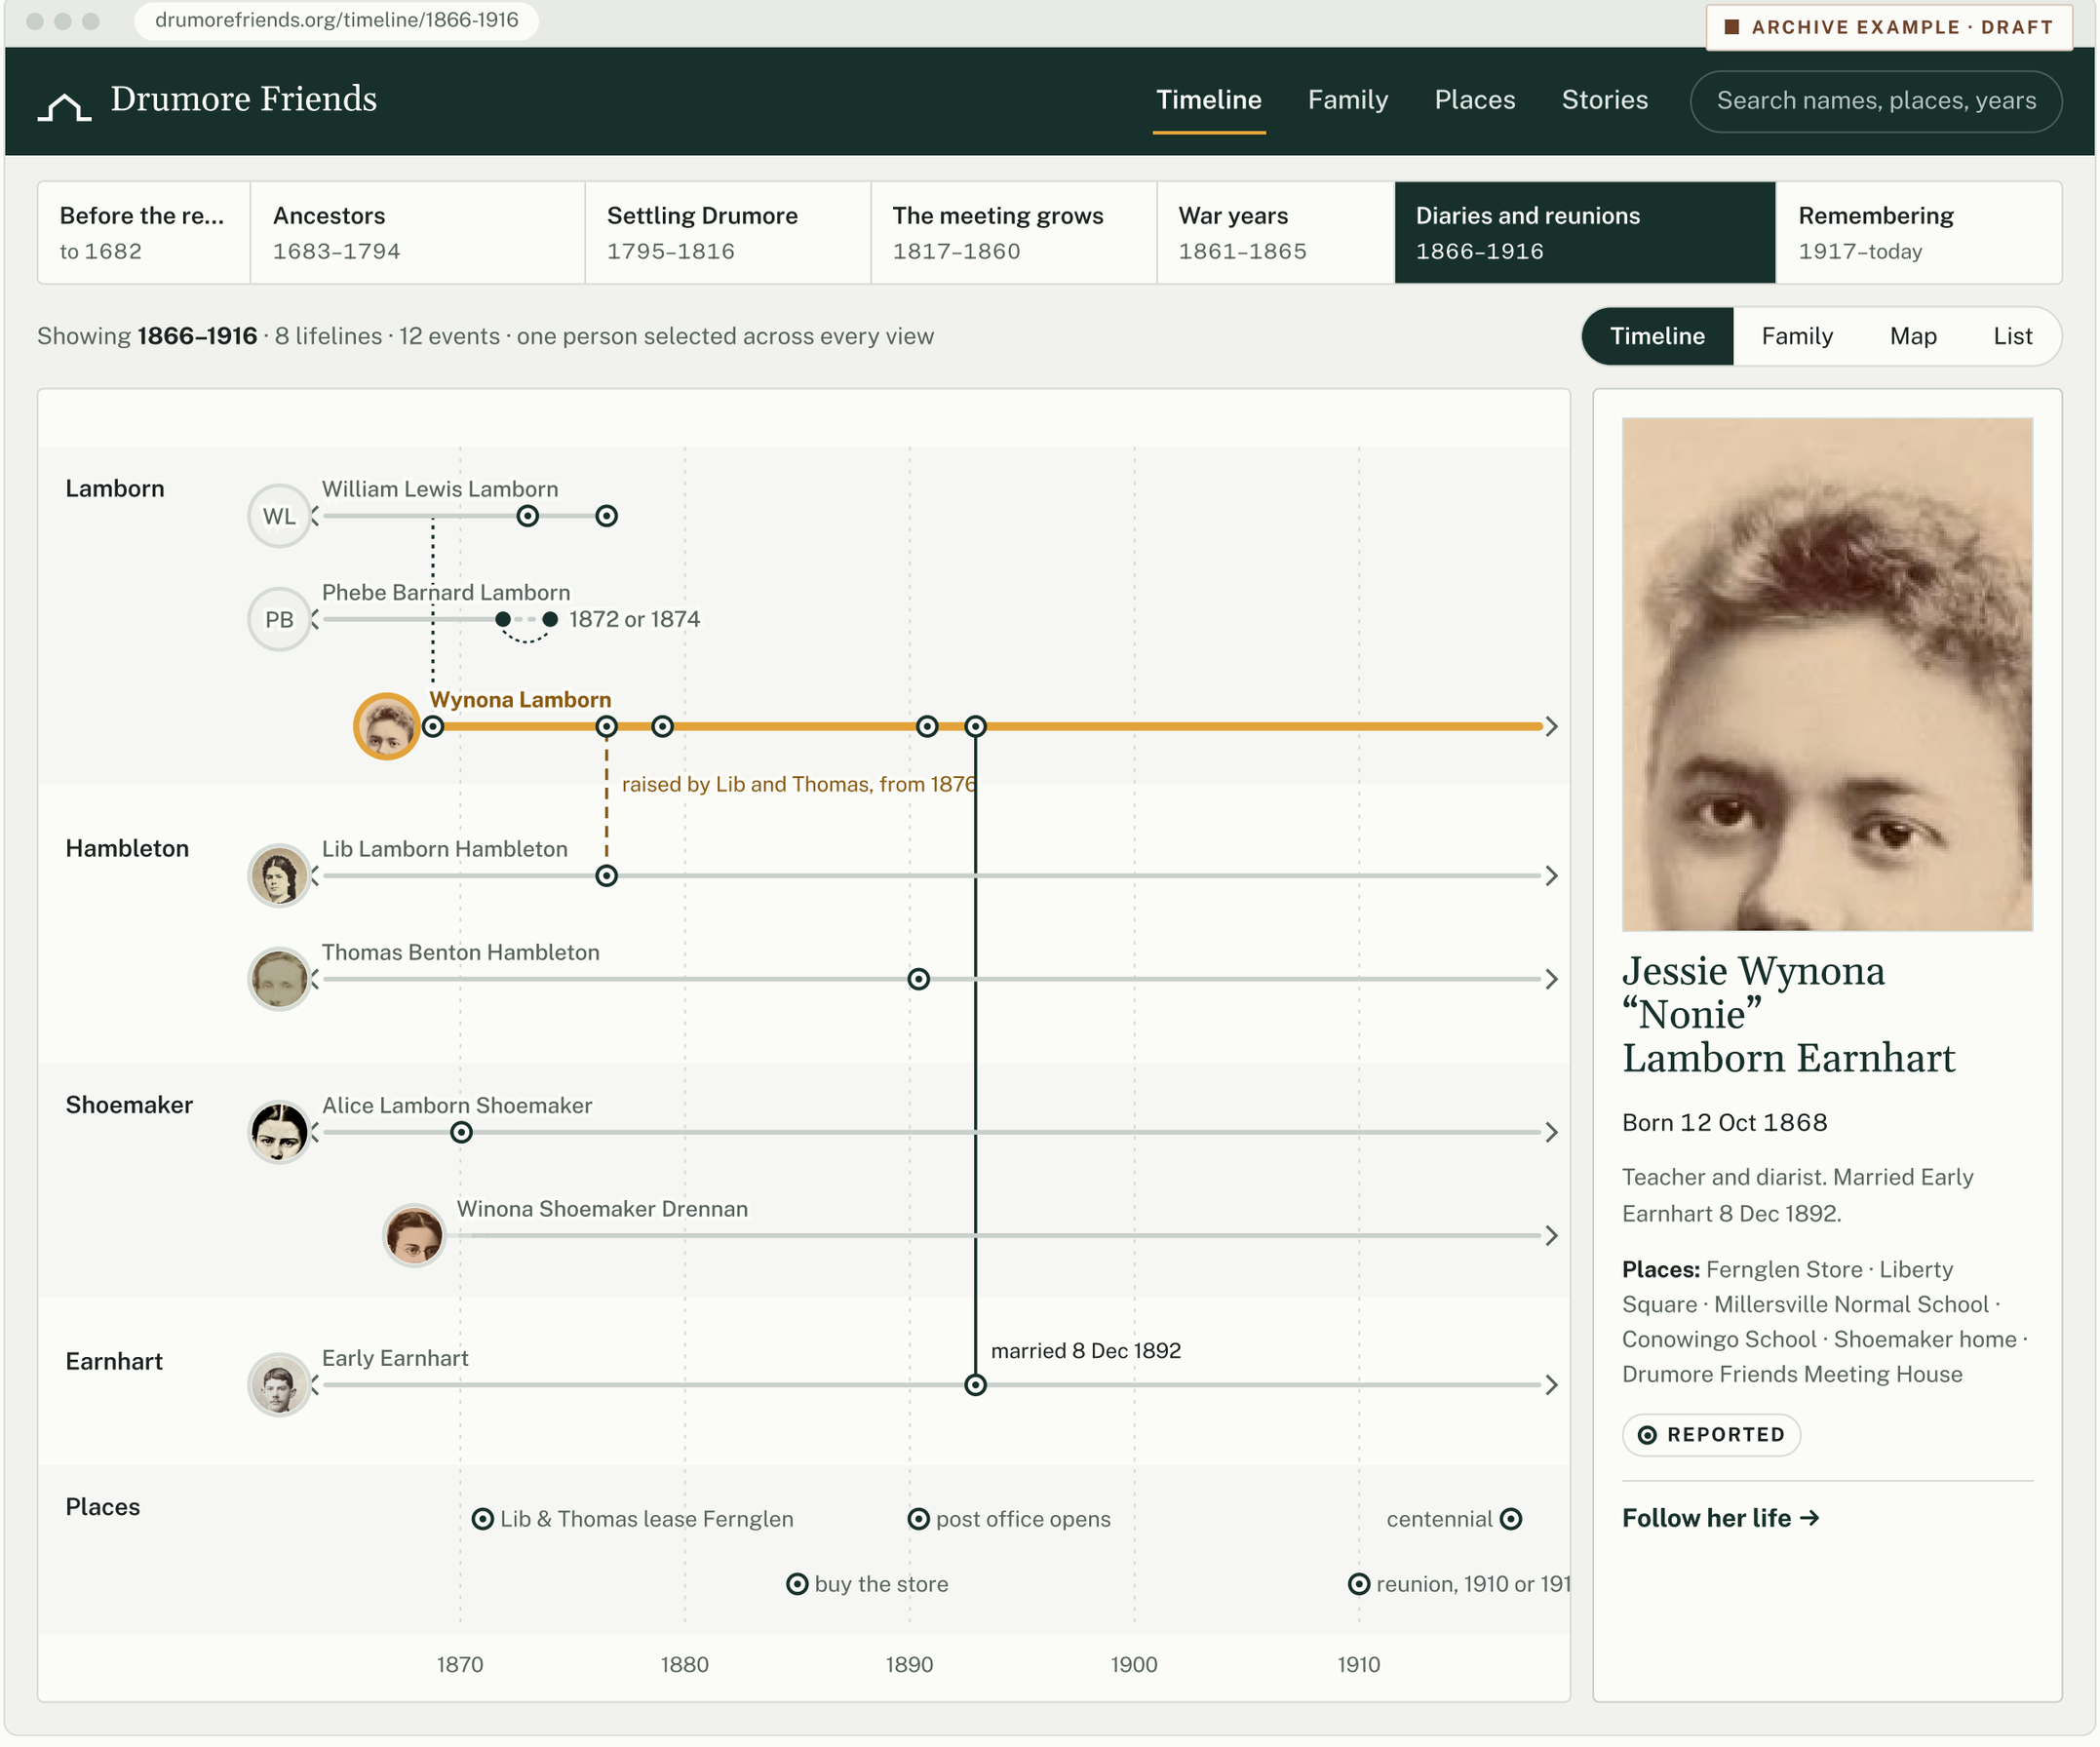

One person's story

drumorefriends.org/people/wynona-lamborn/the-diary-begins

ARCHIVE EXAMPLE · DRAFT

Drumore Friends

Timeline Family Places Stories Search names, places, years



Wynona Lamborn

born 12 Oct 1868
married Early Earnhart, 1892

Jessie Wynona "Nonie" Lamborn. Raised at the Fernglen Store by her aunt and uncle after her parents died. A teacher, diarist and musician.

- 12 Oct 1868 — Born
- 1873 — Her father writes her a letter
- 5 Jul 1876 — Her father dies; she goes to Fernglen
- 1879 — Starts an autograph book
- 12 Oct 1890 — Begins her diary
- Nov 1890 — A week at the Institute, Millersville
- Feb 1891 — Tiddlywinks reaches Drumore
- 8 Dec 1892 — Marries Early Earnhart

Back to 1890 · timeline

12 Oct 1890 · REPORTED · Scene 5 of 8 · Fernglen and Fulton Township

On her twenty-second birthday, Wynona begins a diary

She had finished teacher training at Millersville and was teaching at the one-room Conowingo School in Fulton Township. That was too far to travel every day, so during the week she lived with Aunt Alice and Uncle Will Shoemaker. On weekends she went home to Aunt Lib and Uncle Thomas at Fernglen.

Her first entry is the longest she ever wrote. "How time flies!" she begins. She kept it up every day until 12 May 1891.



ORIGINAL · diary

The title page. **See the original →**



ORIGINAL · photograph

Home: the Fernglen Store, Drumore. **Open the map →**



ORIGINAL · postcard

Where she trained: Millersville.

> *"This being my twenty-second birthday, I thought it would be a good time to start a diary."*

Diary, 12 Oct 1890 · Read the page and transcription

← 1879 · Starts an autograph book

Nov 1890 · A week at the Institute →

CHAPTER 15

Wynona's story, end to end

A visit from Facebook to the source and back, on a phone. Built from Beth's posts so the system can be judged with real material. The dates and relationships are as she reported them and still need checking.

1 · The link preview on Facebook



12 Oct 1890


Wynona begins her diary

Drumore Friends


Each story generates a 1200 × 630 card: photo left, date in Walnut, title in Gelasio, mark bottom-left.

Why phones first


Nearly every visit starts with a tap in the Facebook app. The phone flow has to be complete: story, timeline, source and family, each one tap from the next, with the same way back.

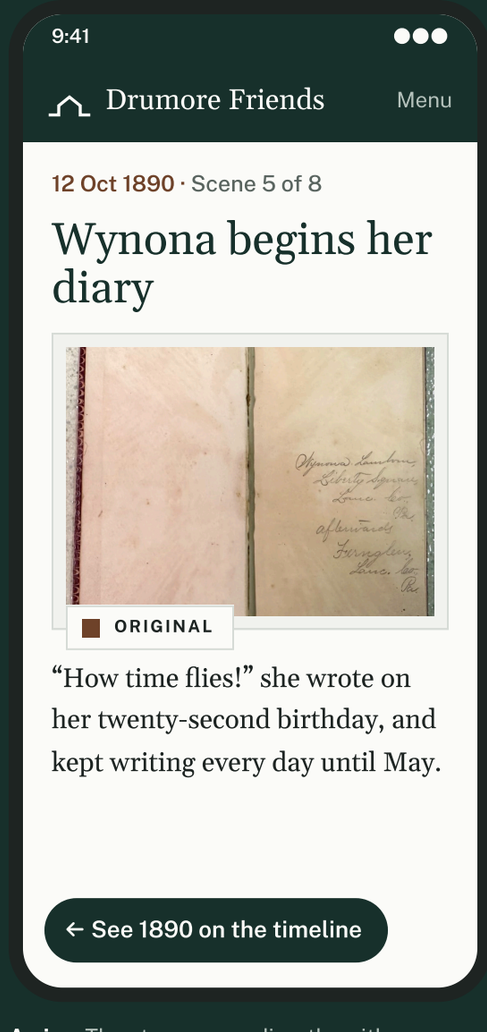


Arrive. The story opens directly, with no splash page.

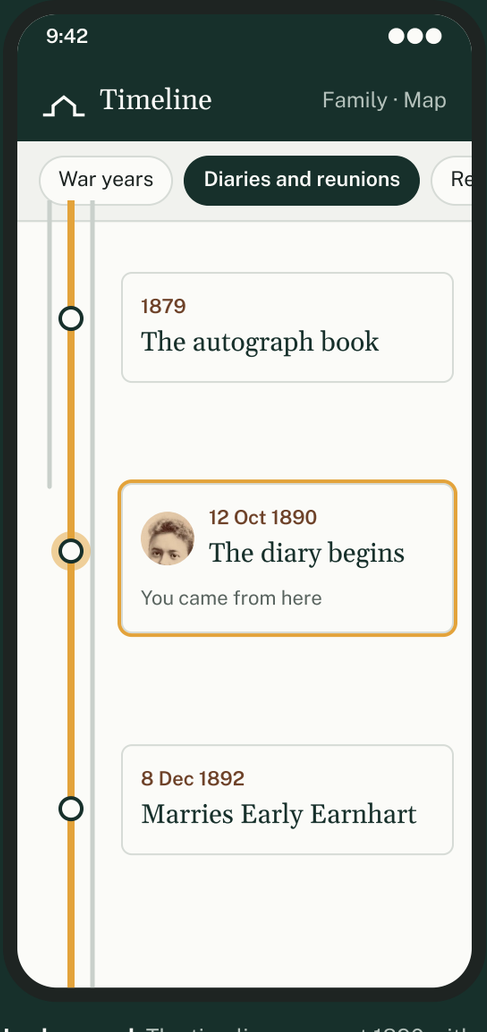

Look around. The timeline opens at 1890 with Wynona already selected.

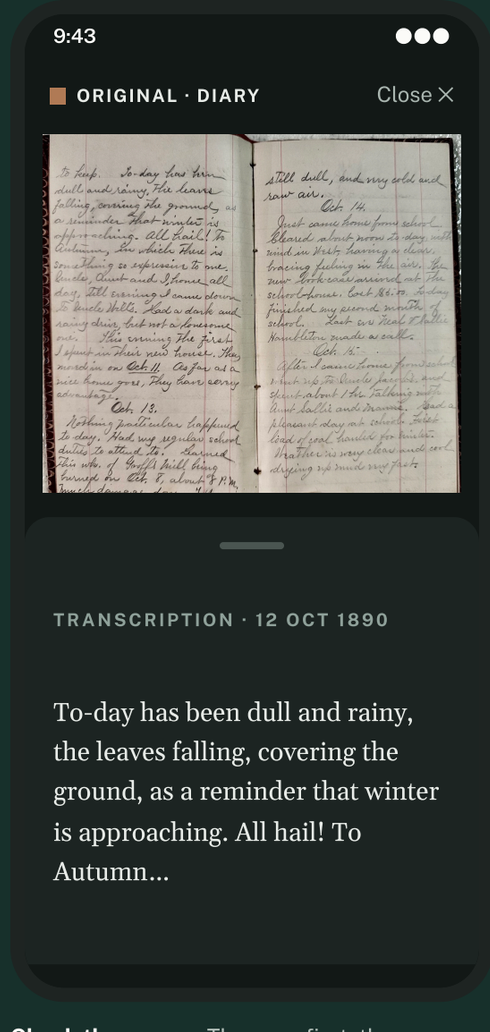

Check the source. The scan first, the transcription in a sheet. Closing returns to the exact scene.

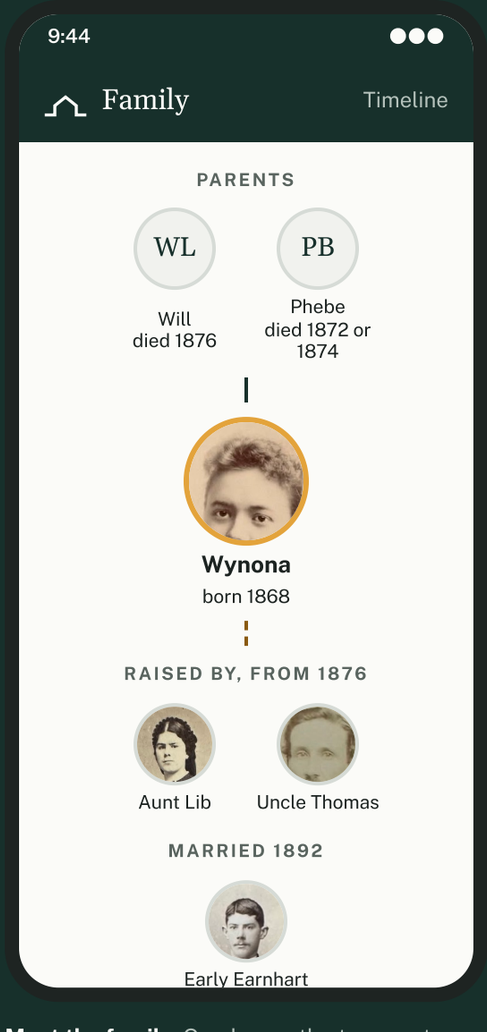

Meet the family. On phones the tree centers on one person. Tap anyone to move the center.

CHAPTER 16

Accessibility and performance

A public history site is for everyone in the family, including the oldest members on the slowest phones.

Accessibility · WCAG 2.2 AA minimum

- Text meets AA everywhere and AAA for body text. Lamp is never text on light grounds.
- Evidence, precision and provenance are always a shape plus a word.
- The timeline and family tree each have a “Browse as a list” equivalent with real headings.
- Keyboard: Tab through people in order, arrows move along a life or branch, Enter opens, Esc goes back. Focus is a 3px Lamp ring.
- Every handwritten page has a plain-text transcription. It is the accessible version and the searchable one.
- Text enlarges to 200% without breaking. Stories are at least 18px.
- Living people appear only with consent, and each person page links to “Suggest a correction.”

Performance · a mid-range phone on 4G

- Every person, story and place has a real server-rendered URL with link-preview tags.
- Largest content shown within 2.5s. First screen under 300 KB before photographs.
- Responsive AVIF or WebP images. Portrait bubbles about 8 KB, timeline thumbnails about 30 KB, full scans as zoom tiles in the viewer only.
- Fonts: Gelasio and Public Sans subset to Latin, about 120 KB. The handwriting face loads only on transcription pages.
- Timeline and tree in SVG up to about 1,500 marks, Canvas beyond that. No WebGL needed.
- TIFF masters live in an archive store, separate from web copies. The website is not the archive.

CHAPTER 17

Do and avoid

For future designers and AI-assisted implementation. Paste this page into prompts.

Do

- ✓ Spell it **Drumore**. Use “Meeting House” as on the sign until Beth decides.
- ✓ Use Gelasio for everything read, Public Sans for everything operated.
- ✓ Use Limewash grounds with Shutter and Bench bands for rhythm.
- ✓ Show every original whole, in its own color, with an Original tab.
- ✓ Put a transcription beside every handwritten page.
- ✓ Label every new image, map and transcription Drawn, with its maker and sources.
- ✓ Give every date its precision and its “as written” form.
- ✓ Draw people as lifelines with portraits, and fade them where the record ends.
- ✓ Show “raised by” as its own link in the family tree.
- ✓ Show conflicts (“1872 or 1874”) and link each source.
- ✓ Keep one amber thing per screen.
- ✓ Design for the phone first. Leave a way back on every screen.

Avoid

- ✕ Sepia, parchment, paper textures, torn edges, wax seals, distressed fonts.
- ✕ High-contrast display serifs with hairlines (Caslon Display, Playfair, Didone faces).
- ✕ Handwriting fonts in the interface, or on anything not labeled Drawn.
- ✕ Cream grounds with a terracotta accent. That is the generic AI look.
- ✕ Colorizing, AI-upscaling faces, generating portraits or historical scenes.
- ✕ AI-generated geography. Prompts are for map style only.
- ✕ Ken Burns pans, parallax, scroll-jacking, autoplay.
- ✕ Exact pins for places known only approximately.
- ✕ Padding partial dates or silently converting Quaker dates.
- ✕ Color coding families. Use labeled lanes and the tree instead.
- ✕ Crosses, steeples, doves or quills in the mark.
- ✕ Treating Facebook posts as the unit of history. Posts are sources for stories.

CHAPTER 18

Tokens and next steps

Starter CSS for the prototype, and what this pass still needs.

```
:root {
  /* Core */
  --limewash: #F1F2EE;  --plaster: #FBFBF8;  --ink: #1C2321;
  --shutter: #17302B;   /* brand green, dark band */
  --bench: #3A2A1F;     /* brand brown, second dark band */
  --pewter: #59645F;    --hair: #D6DBD6;   --mist: #C9D0CB;
  /* Meaning */
  --walnut: #6E4229;    /* Original */
  --river: #2E6273;     /* Drawn */
  --lamp: #E3A33B;      /* Selected: fills and lines only */
  --lamp-ink: #8A5A10;
  /* Source viewer */
  --night: #121816;  --night-2: #1C2422;  --night-fg: #E7EBE7;
  /* Map */
  --m-field: #E4E7DC;  --m-field-2: #DCE1D2;  --m-woods: #CDD7C4;
  --m-water: #BCD1D5;  --m-road: #FFFFFF;   --m-line: #C5CCC2;
  /* Transcription paper */
  --paper: #FCFCF9;  --rule-blue: #B9CCE0;  --rule-red: #D9A3A0;  --hand-ink: #27324A;
  /* Type */
  --f-serif: "Gelasio", Georgia, serif;
  --f-ui: "Public Sans", system-ui, sans-serif;
  --f-hand: "Kalam", cursive;           /* Drawn transcriptions only, option A */
  --f-hand-b: "Petrona", Georgia, serif; /* option B, set in italic */
  --fs-display: clamp(38px, 6vw, 54px);
  --fs-title: clamp(28px, 4vw, 36px);
  --fs-story: clamp(18px, 1.2vw + 12px, 19px);
  --lh-story: 1.62;  --measure: 64ch;
  /* Shape and motion */
  --radius: 6px;  --hit: 44px;
  --ease: cubic-bezier(.2, .7, .2, 1);
  --t-quick: 140ms;  --t-move: 240ms;  --t-travel: 420ms;
}
```

What would sharpen this next

1. **Beth checks the family tree and Wynona's scenes.** Every relationship here comes from her posts, so she is the first reviewer.
2. **Original scans** at 600 dpi of the diary, the letter, the key portraits and the 1864 map. The Facebook copies are compressed to about 1000px.
3. **The name:** "Meeting House" or "Meetinghouse," and whether "Established 1816" can be cited.
4. **Whether "Held in the Light" is welcome** as a public phrase.
5. **Real maps in Figma**, traced from county GIS and the 1864, 1875 and 1899 maps, styled with the prompts in chapter 10.
6. **Transcriptions:** draft the rest of the diary and the letter, then Beth checks them.
7. **Rights and credits** for the images that open the site, including the Solanco Historical Society's diary.
8. **A reading test.** Beth and three older descendants try the phone flow on their own phones.

Archive images: Drumore Friends Meeting House Facebook page. Shown for design review; credits and rights to confirm before public use.